

SP ProFlange[®] 20

Starter Package with IT for Flange Flatness



Content of Starter Package with IT for **Flange Flatness**

SP ProFlange® 20

T330 Self Levelling Sweep Laser (BG 830203)



The T330 levelling laser makes even difficult measuring tasks easy!
A laser transmitter transmits the signal and a detector measures the beam position. Done!

R280 Laser Receiver (BG 831500)



The R280 measures the position of the rotating laser beam. The CCD Sensor has total measurement range of 40mm. The beam forms an entire reference plane. The R280 is wireless and can measure up to a distance of 80m from the Laser.

DU 320 Rugged UMPC with touchscreen (IT 200410)



Rugged UMPC for industrial on-site.

The UMPC offers protectors, shockproof design, holder for hand/arm.

- Change External Batt-Pack during use.
- Shockproof
- Water resistant

Standard accessories: IT 200207 External Li-Ion Akku.

Optional accessories: IT 200208 External Charging station for IT 200207

T330 Flange Mounting Kit (BG 830580)



This adapter is of great practical help for measuring the flanges. It can be used to install the T330 in vertical position at the flange.

Magnetic holder for R280 (BG 831510)



Block magnet (BT 943105) complete with a rotational adapter. This enables the mounting of a R280 Sensor on several surfaces.

The adapter can be mounted at the upper or lower side of the R280.

Power supply cable for T330 (BG 800026)



Power supply cable for the T330 with straight plug.

12 V, 450 mA
incl. adapter

Battery Pack Li-Ion for R280 (BT 800071)




External battery pack.

Battery Charger for R280 (BT 800072)



External battery charger for batteries.

ProFlange v3 Software with starter license for R310/R280 (SW 200025)

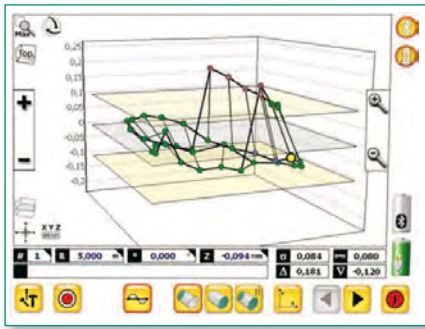

ProFlange V3 – Flange measurement at its best

Easy measurement and full analysis in one software

- Easy and fast On Site measurement mode or full administrator mode
- 2D and 3D Views, free rotation in 3D
- Data view with all measurement and analysis results
- short waviness and flange angle at a glance
- No limit to the amount of rings or points to be measured
- One click report with all graphics and values in pdf format
- Easy to use touchscreen software

Laser kit Case small with foam inlays – IP 65 – version T330, R280 (BG 990104)



Rugged Case IP65 with wheels and telescope handle.

The small case is complete with the following main foam inlays:

- BT 990043: Foam inlay for 2x R280, R5XX or R310
- BT 990027: Foam inlay for UMPC
- BT 990029, BT 990030: Foam inlay for T330

Please contact us for further informations or questions.



Status Pro Maschinenmesstechnik GmbH
Mausegatt 19
D-44866 Bochum
Phone: + 49 (0) 2327 - 9881 - 0
Fax: + 49 (0) 2327 - 9881 - 81
www.statuspro.com
info@statuspro.com

PC 1027E 11/13 - Design / DTP: Seichter & Steffens Grafikdesign, D-44229 Dortmund.
Copyright 2013 Status Pro Maschinenmesstechnik GmbH. ProFlange® is a registered trademark and subject to trademark rights of Status Pro Maschinenmesstechnik GmbH. This document or parts thereof may not be copied or otherwise reproduced without the permission of Status Pro GmbH. The technical details are subject to change without notification.

We would appreciate being informed of any errors in this document.

Distributor

