

SP ProLevel® 40

Flatness and Level Professional Package with IT



Content of Flatness and Level Professional Package with IT

SP ProLevel® 40

T330 Self Levelling Sweep Laser (BG 830203)



The T330 levelling laser makes even difficult measuring tasks easy! A laser transmitter transmits the signal and a detector measures the beam position. Done!

3x R310 Laser receiver (BG 830134)



The R310 measures the position of the rotating laser beam. The CCD Sensor has total measurement range of 80mm. The beam forms an entire reference plane. The R310 is wireless and can measure up to a distance of 80m from the Laser.

RC310 Remote Control for T330 and R310 Monitor (BG 830930)



- Remote control for the T330
- Remote Display of current R310 values

The RC310 is of great practical use in most applications:

- for establishing reference lines in roll parallelism
- for adjusting the T330 laser position
- it saves you a great deal of shoe leather on-site

DU 320 Rugged UMPC with touchscreen (IT 200410)



Rugged UMPC for industrial on-site.

The UMPC offers protectors, shockproof design, holder for hand/arm.

- Change External Batt-Pack during use.
- Shockproof
- Water resistant



Mounting Kit for T330 (BG 830205)

Using the swivel and tilt adapter you can align the laser level, irrespective of the surface below. The Adapter also allows for a parallel movement which is very useful when aligning the laser parallel to a reference object. The Adapter is accommodated with a 5/8" thread, and is also fitted with a three-point magnet arrangement underneath.

3x Switch magnet with prism bottom – 60 x 50 x 55 mm – M8 – 750N (BT 943105)



Block magnet for many measuring and fixing tasks.

The upper surfaces has an M8 thread for attachment purposes.

Dimensions: 60 x 50 x 55 mm, 750N

3x Screw adapter M8 (BT 948336)



Screw adapter with an M8 thread to enable the R310 or R280 to be mounted on different objects.

Installed adapter length: 30 mm

Floor, wall and Tripod adapter for R310 (BG 830119)



This adapter is of great practical help for mounting R310 in a large variety of applications.

Be it simply to mount the R310 on a Tripod, make a reference point on a wall, or pickup reference floor points. This adapter can also be used to make additional parallel reference lines. This is very useful for machine assembly personnel.

Measuring tape with raster holes for BG 830119 (BT 989047)



Special tape measure with raster holes at fixed distances to allow an exact parallel movement.
i.e. useful when moving reference lines.

Power supply cable for T330 (BG 800026)



Power supply cable for the T330 with straight plug.

12 V, 450 mA
incl. adapter

3x Battery Compartment with Bluetooth for R310 (BG 830135)



Accessory for a R310 Laser Receiver.

3x Battery Pack Li-Ion for R310 (BT 800071)



External battery pack.

3x Battery Charger for R310 (BT 800072)



External battery charger for batteries.

External Battery for DU320 (IT 200207)




External battery for the display unit DU 320. While using a second battery at the display unit, the first will be charged in the charging station. The external battery pack can be changed during use.

Battery Charger for DU320 (IT 200208)



External battery charger for batteries of the display unit DU 320.

ProLevel v2 Software with starter license for R310 (SW 200030)

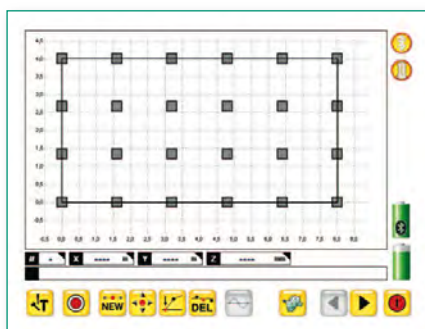

ProLevel V2 - Software for optimum surface measurement

Easy measurement and professional analysis

- Automatically connection management, wireless via Bluetooth
- Measurement of unlimited points
- Free positioning of point coordinates
- Zeroing of three points or best-fit analysis
- Adjustment with live values
- 3D view
- Data view with all values and calculations
- One click export of all graphics and data in table format
- Easy to use touchscreen software

Big laser system case with foam inlays (BG 990105)



Rugged Case IP65 with wheels and telescope handle.
The small case is complete with the following main foam inlays:

- BT 990020: Foam inlay for R310, R5XX
- BT 990027: Foam inlay for UMPC
- BT 990029, BT 990030: Foam inlay for T330

Please contact us for further
informations or questions.



 **Status Pro**
maschinenmesstechnik

Status Pro Maschinenmesstechnik GmbH
Mausegatt 19
D-44866 Bochum
Phone: + 49 (0) 2327 - 9881 - 0
Fax: + 49 (0) 2327 - 9881 - 81
www.statuspro.com
info@statuspro.com

PC 1024E 11/13 - Design / DTP: Seichter & Steffens Grafikdesign, D-44229 Dortmund.
Copyright 2013 Status Pro Maschinenmesstechnik GmbH. ProLevel® is a registered
trademark and subject to trademark rights of Status Pro Maschinenmesstechnik GmbH.
This document or parts thereof may not be copied or otherwise reproduced without the
permission of Status Pro
GmbH. The technical de-
tails are subject to change
without notification.

We would appreciate
being informed of any er-
rors in this document.

Distributor